

# MODEL S70/S70C

## SOFT SERVE FREEZER

TWIN TWIST, FREE STANDING, DIGITAL CONTROL



Ideal for **extremely high capacity outlets** to serve ice cream, frozen yogurt or sorbet. Small footprint helps save floor space.



### FAST FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



### DIGITAL CONTROL AND DISPLAY

Digital control provides access to system settings and displays critical system information



### AUTO PROGRAMMING

Allows automatic switching of operation modes based on preset schedules



### STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



### HOPPER AGITATOR

Maintain product consistency and prevent product separation



### SOFT SYSTEM START

Slow motor start reduces equipment noise and stress on drive train



### DIRECT DRIVE TRANSMISSION

Eliminates consumable moving parts and increases transmission efficiency



### SAFETY PROTECTIONS

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



### DEFROST FOR CLEANING



Increases efficiency during cleaning by heating frozen product in cylinder. Automatically prevents product overflow after dispense.

**MOST POWERFUL AND VERSATILE TWIN TWIST, EXTREMELY HIGH CAPACITY FREESTANDING FOR ICE CREAM, FROZEN YOGURT, SORBET AND MUCH MORE**

# MAXIMISE YOUR PROFITS

# MODEL S70/S70C

## SOFT SERVE FREEZER MACHINE

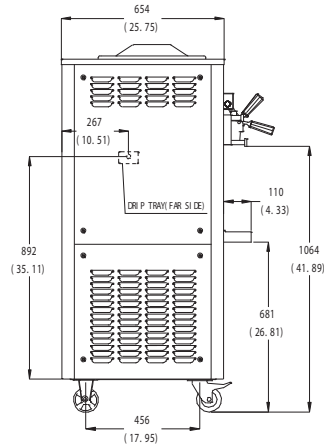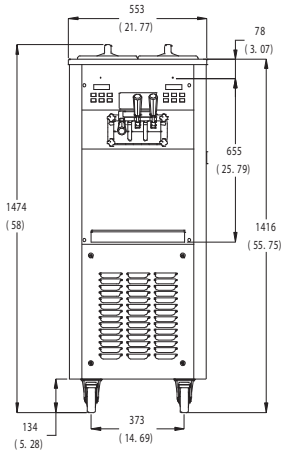

ISO 9001 REGISTERED

### SPECIFICATIONS

Flavours	2 + Twist	
Freezing Cylinders	2 x 3.2L / 3.4qt	
Mix Hoppers	2 x 15L (10L for A)	
Output Capacity (80 grams)	720 serves/hr	
Clearance Requirements	152mm/6" on back	

WEIGHT	KG/LB (Gravity)	KG/LB (Pump)
Net	253 / 562	263 / 585
Shipping	273 / 607	283 / 629
Volume	0.90 CBM / 3 8.62 CBF	

DIMENSIONS	NET (MM/IN)	SHIPPING (MM/IN)
Width	532 / 20.9	710 / 28.0
Depth	823 / 32.4	890 / 35.0
Height	1563 / 61.5	1730 / 68.1

### ELECTRICAL

3 phase electrical requirement
--------------------------------

### FEATURES

CONTROL SYSTEMS	TWO, DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
HOPPER AGITATOR	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT & ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR OVERLOAD PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
DEFROST & QUICK REFREEZE	<input checked="" type="checkbox"/>
SOFT START	<input checked="" type="checkbox"/>
DIRECT DRIVE PUMP (A ONLY)	<input checked="" type="checkbox"/>
S70C - PUMP FEED MODEL AVAILABLE	<input checked="" type="checkbox"/>
AIR PUMP OPTION, AVAILABLE	<input checked="" type="checkbox"/>
S70C - PUMP AND PASTEURISATION AVAILABLE	<input checked="" type="checkbox"/>
S70A - PUMP FED AVAILABLE	<input checked="" type="checkbox"/>
INVERTER SYSTEM	<input checked="" type="checkbox"/>